

TYPE	52-1
------	------

MAIN DIMENSIONS AND STANDARD PARTICULARS

1. Leakage distance

178mm
2. Power frequency puncture voltage

80kV
3. Average flashover voltage
- 1) Power frequency

Dry

60kV

Wet

30kV
- 2) Critical-Impulse flashover 15x40us waves

Positive

100kV

Negative

100kV
4. Radio-Influence Voltage Data

1) Test voltage to ground

7.5kV


2) Maximum RIV at 1000KHZ

50μV
5. Rated E&M failing load

45kN
6. Tension proof load

22kN
7. Impact strength

5N.m
8. Glaze color: Brown

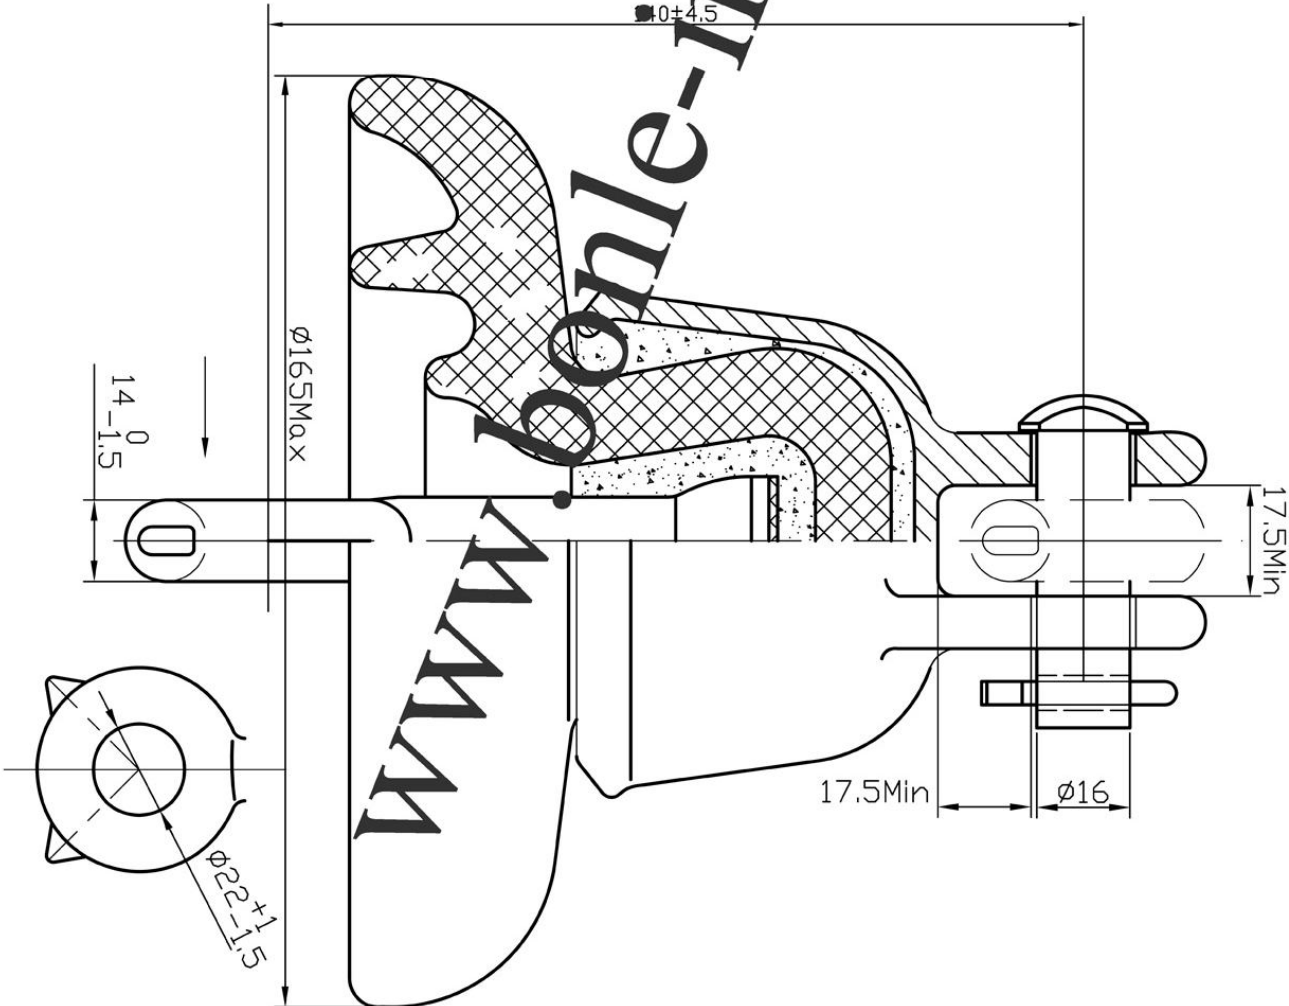

Manufacture:	BONLE (FUZHOU) INTERNATIONAL CO., LTD.	
	PORCELAIN DISC SUSPENSION INSULATOR	
DESIGN	WU REN GUO	