


TYPE	52-3
------	------

MAIN DIMENSIONS AND STANDARD PARTICULARS

- | | |
|-------------------------------------|--------|
| 1. Leakage distance | 292mm |
| 2. Coupling size | 16B |
| 3. Power frequency puncture voltage | 110kV |
| 4. Average flashover voltage | |
| 1) Power frequency | |
| Dry | 80kV |
| Wet | 50kV |
| 2) Critical-impulse 15x40us Wave | |
| Positive | 125kV |
| Negative | 135kV |
| 5. Radio-influence voltage data | |
| 1) Test voltage to ground | 10kV |
| 2) Maximum RIV at 1000KHZ | 50μV |
| 6. Rated E&M failing load | 70kN |
| 7. Tension proof load | 35.5kN |
| 8. Lmpact strength | 6N.m |

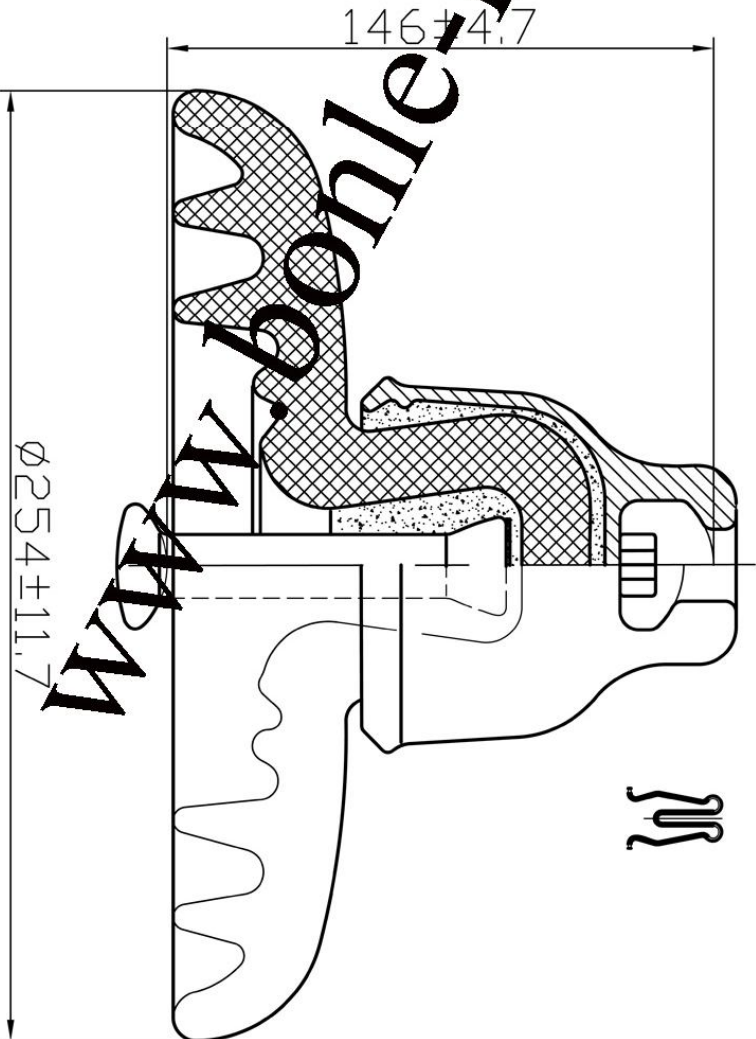

Manufacture: BONLE (FUZHOU) INTERNATIONAL CO., LTD.	PORCELAIN DISC SUSPENSION INSULATOR DESIGN WU REN GUO
---	---