


TYPE	XP-45
------	-------

MAIN DIMENSIONS AND STANDARD PARTICULARS

Highest system Voltage	12kV
Rate Voltage	11kV
Porcelain Diameter(min)	
Spacing	
Creepage Distance(min)	
Power Frequency Puncture	
Withstand Voltage	1.3 x Actual dry flashover voltage
Wet Power Frequency	
Withstand Voltage	35kV
Impulse Withstand Voltage	75kV
Puncture Power Frequency	
Voltage(min)	105kV
Visible Discharge Voltage	9kV
Mechanical Strength	45kN
Ball and Socket Size	16mmB
Applicable Standard for	
Special Characteristics	IS:3188-1980

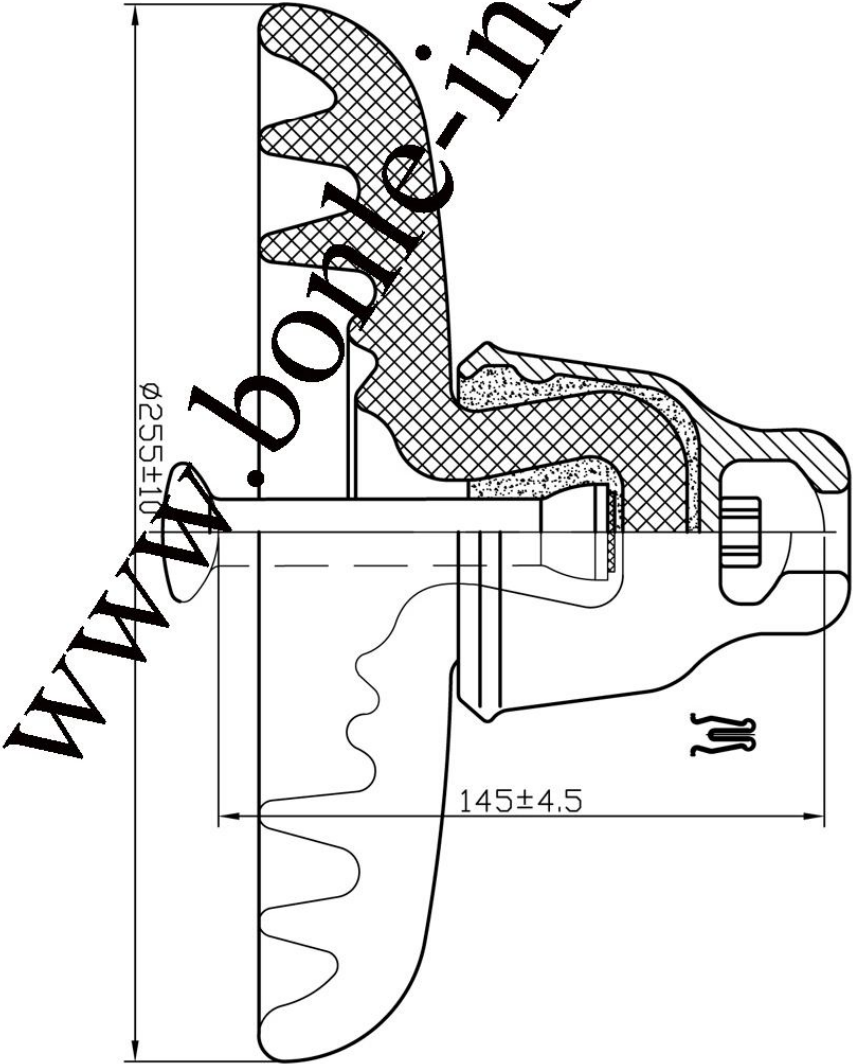

Manufacture: BONLE (FUZHOU) INTERNATIONAL CO., LTD.		STRAIN TYPE INSULATOR	DESIGN
			JJ