


TYPE	U70BL(52-3)
------	-------------

MAIN DIMENSIONS AND STANDARD PARTICULARS

- | | |
|--|---------|
| 1. Leakage distance | 320mm |
| 2. Coupling size | 16A/R |
| 3. Power frequency puncture voltage | 130kV |
| 4. Power frequency withstand voltage , wet/dry | 40/70kV |
| 5. Impulse withstand voltage/disc | 10kV |
| 6. Raido-influence voltage data | |
| 1) Test voltage to ground | ±0kV |
| 2) Maximum RIV at 1000KHZ | 50µV |
| 7. Rated E&M failing load | 70kN |
| 8. Tension proof load | 35kN |
| 9. Impact streng | 6N.m |

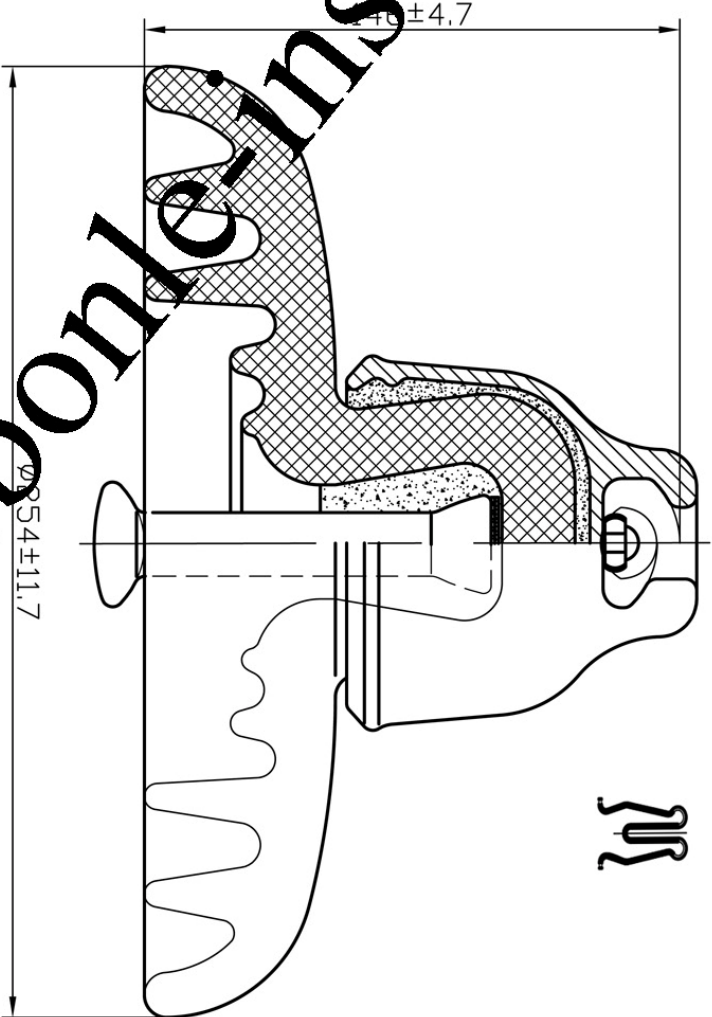

Manufacture:	
--------------	--

BONLE (FUZHOU) INTERNATIONAL CO., LTD.

PORCELAIN DISC SUSPENSION INSULATOR

DESIGN
WU REN GUO